

TESmert TESmart

User Manual

4x4 HDMI Matrix



HMA0404A40

English

Preface

It's our great honor that you have chosen the HDMI Matrix produced by our company, Tesla Elec Technology Co.,Ltd. In this user manual, you will learn how to operate and use this product. Please read this user manual comprehensively before use. If you have any questions, comments or suggestions, you can contact us via the following email:
support@tesmart.com.

Copyright Notice

The user manual, compiled by Tesla Elec Technology, shall not be duplicated or translated by any person or organizations without written permission. This user manual shall not be used for commodity transaction in any form or by any means (electronically, mechanically, photocopying or recording, etc.) or be used for any business practices or profitable activities. The ownership of the trade names and brand names adopted in this user manual belongs to their companies.

Address of Manufacture









Tesla Elec Technology Co.,Ltd
2F, Building C, Xingzhisheng Industrial Park, No.12,
Xiawei Industrial Zone, Zhangkengjing Road,
Guanlan Street,
Longhua District, Shenzhen City, Guangdong
Province, China

Contents


1. Safety Tips and Warnings	01
2. Battery Description	02
3. Warranty Information	03
4. Preface	04
5. Features	05
6. Packing List	06
7. Panel Description	07
8. Connection Description	09
8.1 Connection Diagram	09
8.2 Connection Steps	10
9. Operation Method	11
9.1 Front Panel Button Switching Method	11
9.2 IR Remote Control	12
9.3 RS232 Control	14

1. Safety Tips and Warnings

Tips: Read the safety tips and warnings for HDMI Matrix comprehensively before use. Use this produce in accordance with its instructions, safety tips and warnings to prevent unnecessary damage to the product and potential dangers to users.

-  Keep the product away from water.
-  Clean the product with dry cloth.
-  Use the product in accordance with its instructions and do not block its vents.
-  Keep the product away from ignition sources, such as heat sinks, heat accumulators, stovepipe and other heat production settings (including audio amplifiers).
-  Do not touch the product and the power cord with wet hands so as to lower the risk of electric shock and the damage to the product. Do not let the product get wet or become damp.
-  Unplug the power supply of this product in thunderstorm days or when it has been not used for a long time.
-  Do not expose this product and its battery to open fire or overheating environment. Dispose the waste battery in accordance with instructions.
-  Users shall not remove and repair the product without authorization.

2. Battery Description

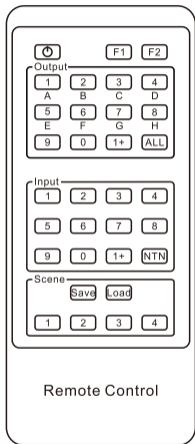

Tips: By default, the remote control is not equipped with batteries, due to the safety requirements of some express companies. Install CR2025 cell before use.

Caution: Improper disposal of the lithium battery may cause an explosion. Do not throw the battery into fire. Keep the battery away from children. Dispose the waste battery in accordance with local regulations.



3. Warranty Information

We warrant this product as free of defects in material and workmanship for a period of one (1) year from the date of shipment. If during the period of warranty this product proves defective under normal use, we will repair or replace this product, provided that this product has not been subjected to mechanical, electrical, or other abuse or modifications. If it fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for six (6) months from the day of reshipment to the buyer.

4. Preface

Dear Users,

HDMI Matrix can greatly facilitate your management of audio and video devices. If you have multiple sources and display devices like game consoles, streaming boxes, projectors and monitors, our HDMI Matrix can help you match your devices at will. You can choose which output device to display which input device as you want, and you can also display one input device on multiple output devices at the same time, eliminating the troublesome of unplugging cables and switching devices, and greatly simplifying the device management.

You can switch input ports with front panel buttons, IR signals and RS232 port.

Tips: If you need to control more devices or conduct more complex and professional switching, you can also choose other products of our company. For more details, you can visit our official website: www.tesmart.com.

5. Features


- Each HDMI output can share same input or select standalone input
- Support resolution up to 3840x2160@30Hz
- HDCP1.4 compliant
- Support PCM, Dolby AC3, DTS5.1 and DSD audio format
- Matrix status could be memorized after power down, automatically restore previous matrix status after next power on
- Smart EDID management, make it compatible with most display devices
- Support 4 configurable user preset connections
- Easy to control matrix via IR receiver, front panel key and PC (via RS232 port)

6. Packing List


- 1 * 4x4 HDMI Matrix
- 1 * IR Remote Control
- 1 * DC 12V Power Adapter
- 1 * User Manual

Tips: After receiving the product, please check the packing list carefully to make sure that no components have been lost and no damage to the product has been caused during transportation. If you have any problems, please contact us at any time.

7. Panel Description

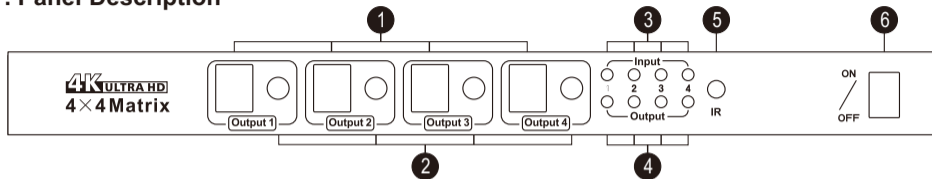


ID	Name	Description	ID	Name	Description
1	Digital display	Display current selected input source number.	4	Output connection status	The LEDs are on to indicate that the corresponding HDMI output device has been connected to the output port and the device has been recognized.
2	Input selection button	Select input port.	5	IR receiver	Receive IR signal.
3	Input connection status	The LEDs are on to indicate that the corresponding HDMI input device has been connected to the input port and the device has been turned on.	6	Power switch	Turn on or off power supply of the matrix.

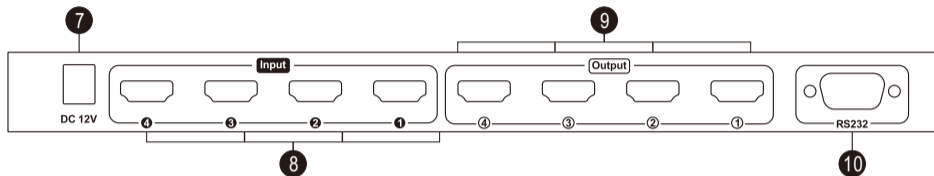

ID	Name	Description
7	DC 12V	DC 12V power supply.
8	HDMI input ports	Connect HDMI source devices.
9	HDMI output ports	Connect to HDMI displays.
10	RS232 port	Connect this port to control termination. Use RS232 commands to select input sources.

8. Connection Description

8.1 Connection Diagram

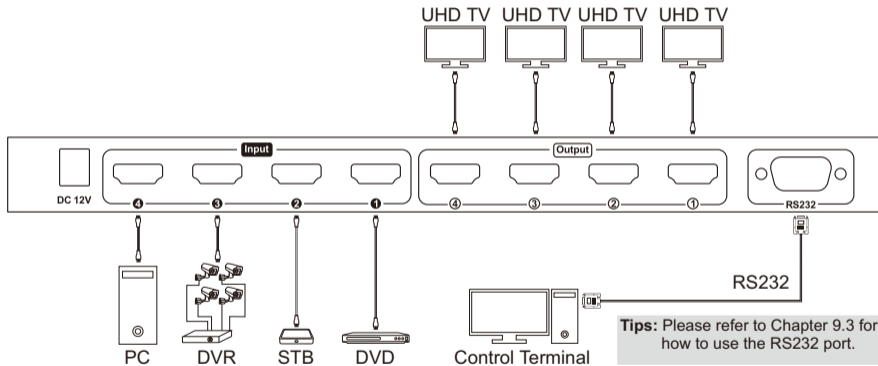

8.2 Connection Steps

1. Connect the input devices to the input ports using 4 HDMI cables.
2. Connect the output ports to the display devices using 4 HDMI cables.
3. Connect the power cable to the HDMI Matrix's DC 12V port and plug it to a power socket.



4. By now, the connection has been completed. Turn on the power supply and the HDMI Matrix will begin to work.

Tips: 1. Please refer to Chapter 9 for detailed information about how to use the HDMI Matrix.
2. By default, the HDMI cables are not included in the package.

9. Operation Method


9.1 Front Panel Button Switching Method



The digital display shows the input port number selected by the current output port, and the button beside every digital display is the input selection button.

Select the output channel you want to control on the front panel (one of "Output 1 ~ Output 4"), continuously press the input selection button beside its digital display, the digital display will cycle from 1 to 4, until the digital display of the output channel shows the input port number you want.

9.2 IR Remote Control

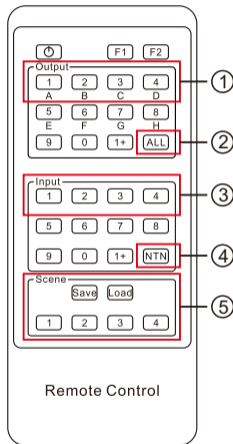

1 to 1 switch

Step 1: Press any key in **Output** to select the output port.

Step 2: Press any key in **Input** to select the source which you want to be displayed on selected output.


1 to all switch:

Step 1: Press the key **ALL** to select all the output ports.

Step 2: Press any key in **Input** to select the source which you want to be displayed on all outputs.

Switch to mirrored connection:


Press the key **NTN**, then the routing status will be changed to Input 1 - Output A, Input 2 - Output B, Input 3 - Output C, Input 4 - Output D.

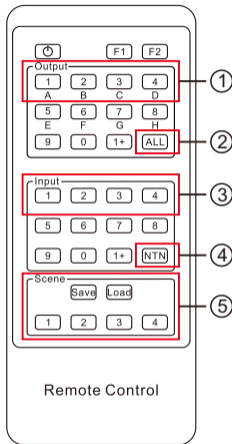

Preset routing for scenes:


Save preset:

Step 1: Press the key  in  .

Step 2: Press any key in  to save current routing status to user preset memory 1/2/3/4.

Load preset:

Step 1: Press the  key in  .


Step 2: Press any key in  to load routing status from user preset memory 1/2/3/4 and apply to current routing.

Tips: Unspecified buttons at above are non-functional.

9.3 RS232 Control

A. Connect RS232 port

Follow the diagram below to connect RS232 port on the HDMI Matrix to your PC.

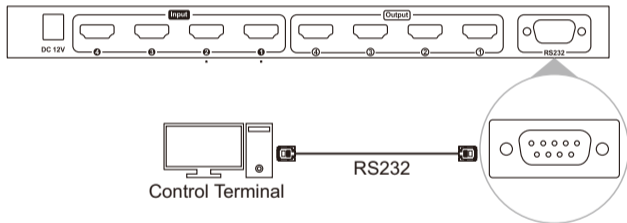

B. Communication protocol

Baud rate: 9600 bps

Stop bit: 1 bit



Data length: 8 bits

The commends are as the following form:

Index	Commend strings	Parameter description	Remark	Direction
1	MT00SW0000NT		Mirrored output 1→1, 2→2...	PC→ Matrix
2	MT00SWXX00NT	XX: input port number 01~04	1 input to all outputs	PC→ Matrix
3	MT00SWXXYYNT	XX: input port number 01~04 YY: output port number 01~04	Connect input XX to output YY	PC→ Matrix
4	MT00RD0000NT		Request Matrix return current connection status.	PC→ Matrix
5	LINK:OYIX;END	X: input port number 1~4 Y: output port number 1~4	Matrix return current connection status to console	Matrix→ PC

C. RS232 port usage:

- Step 1: Use RS232 cable connect PC to HDMI Matrix.
- Step 2: Running the HDMI Matrix Controller. Select page 'General' and click 'Serial control'.
- Step 3: Select the serial communication port number which is connected to the HDMI Matrix.
- Step 4: Click 'Connect' to connect to the HDMI Matrix.
- Step 5: Select page "Matrix Control", and click the button to Control the Matrix.

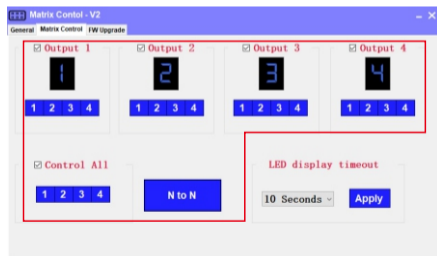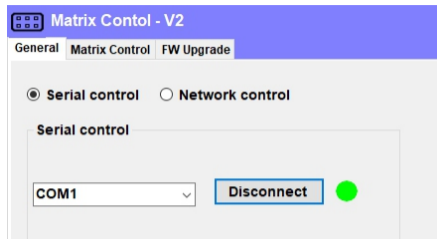

D. 4X4 HDMI Matrix Controller

Based on the communication protocol in Section B, we provide a controller on the Windows OS. you can visit our official website to download it:


www.tesmart.com.

You can also develop dedicated controllers for each platform by referring to the control protocol in Section B.

Page description

Page 'General' :

This page is used to set up the parameters to use RS232 commends and the LAN port to connect matrix.

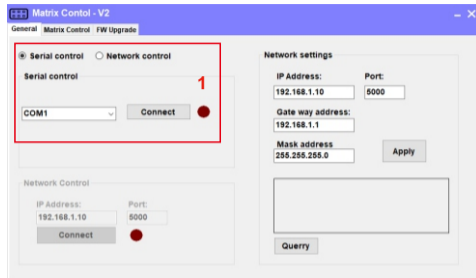


1-Serial connect

Tips: Since this product has no LAN port, the network connection and control part of the software has no practical function.

Page 'Matrix Control' :

This page is used for switching and simple system setup. You can conveniently match input and output devices according to your needs.

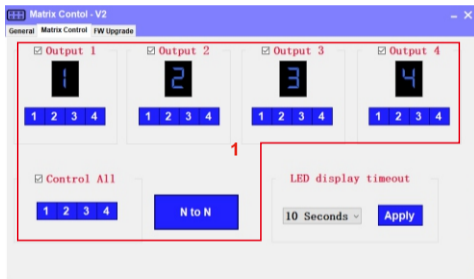

1-Switch control panel

Tips: The LED display timeout part of the software has no practical function.

TESmert TESmart

To Enjoy Smart

HMA0404A40

Tesla Elec Technology Co.,Ltd

CE FC   HDCP 

WEEK-Reg.-Nr. DE 66784279