





Preface

It's our great honor that you have chosen the HDMI Switch produced by our company, Tesla Elec Technology Co.,Ltd. In this user manual, you will learn how to operate and use this product. Please read this user manual comprehensively before use. If you have any questions, comments or suggestions, please contact us via the following email: tech@tesmart.com.

Copyright Notice

The user manual, compiled by Tesla Elec Technology, shall not be duplicated or translated by any person or organizations without written permission. This user manual shall not be used for commodity transaction in any form or by any means (electronically, mechanicall y, photocop ying or recording, etc.) or be used for any business practices or profitable activities. The ownership of the trade names and brand names adopted in this user manual belongs to their companies.

Address of Manufacture

Tesla Elec Technology Co.,Ltd 2F, Building C, Xingzhisheng Industrial P ark, No.12, Xiawei Industrial Zone , Zhangkengjing Road, Guanlan Street, Longhua District, Shenzhen City , Guanadong Province. China


Contents

1. Safety Tips and Warnings 01
2. Battery Description ····································
3. Warranty Information 03
4. Preface
5. Features
6. Packing List······06
7. Panel Description ···· ··· ··· ··· ··· ··· ··· ··· ···
8. Connection Description ······09
8.1 Connection Diagr am
8.2 Connection Steps
9. Switch Modes Description 12
9.1 Manual Switch Mode
9.2 Auto Switch Mode
10. Audio Modes Description 13
11. CEC Function Description 14
12. IR Remote Control 15

1. Safety Tips and Warnings

- Tips: Read the safety tips and warnings for HDMI Switch comprehensively before use. Use this produce in accordance with its instructions, safety tips and warnings to prevent unnecessary damage to the product and potential dangers to users.
- A Keep the product away from water.
- **A** Clean the product with dry cloth.
- Lose the product in accor dance with its instructions and do not block its v ents.
- A Keep the product away from ignition sources, such as heat sinks, heat accumulators, stovepipe and other heat production settings (including audio amplifiers).
- ▲ Do not touch the product and the power cord with wet hands so as to lower the risk of electric shock and damage to the pr oduct. Do not let the pr oduct get wet or become damp .
- Unplug the power supply of this product in thunderstorm
 days or when it has been not used for a long
 time.
- ▲ Do not expose this product and its battery to open fire or overheating environment. Dispose the waste battery in accor dance with instructions.
- Losers shall not remove and repair the pr oduct without authorization.

2. Battery Description



Tips: By default, the remote control is not equipped with batteries, due to the safety requirements of some express companies. Install AAA dry cells before use.



Caution: Improper disposal of the lithium battery may cause an explosion. Do not throw the battery into fire. Keep the battery away from children. Dispose the waste battery in accordance with local r egulations.

3. Warranty Information

We warrant this product as free of defects in material and workmanship for a period of one (1) year from the date of shipment. If during the period of warranty this product proves defective under normal use, we will repair or replace this product, provided that this product has not been subjected to mechanical, electrical, or other abuse or modifications. If it fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for six (6) months from the day of reshipment to the buyer.

4. Preface

Dear Users:

HDMI Switch can greatly facilitate your management of audio and video devices. If you have a home theater or entertainment setup with multiple sources and display devices like game consoles, streaming boxes, and set-top boxes, it can be hard to manage in terms of cables and switching devices. Our HDMI Switch can help you add more inputs to your TV or AV receiver if you have too many devices to manage. With this HDMI Switch, you can also get original digital audio through S/PDIF optical audio port.

Tips: If you need to contr ol more devices or conduct mor e complex and pr ofessional switching, y ou can also choose other products of our company. For more details, please visit our official website: www.tesmart.com.

5. Features


- With 4 HDMI inputs and 1 HDMI output
- Support resolution up to 4 K@60Hz 4:4:4
- HDCP 2.2 compliant
- Support auto input detection
- Support audio output via S/PDIF optical and L/R AUX interface
- Support 3 modes of audio output
- Support Dolby TrueHD, DTS-HD Master Audio, Dolby Digital and AC-3 audio tr ansmission
- Easy to switch input sour ce with IR remote contr ol and panel button
- Support HDR 10 and Dolby Vision

6. Packing List


- 1 * 4x1 HDMI Switch
- 1 * IR Remote Control
- 1 * DC 5V Power Adapter
- 1 * User Manual

Tips: After receipt of the product, please check the packing list carefully to make sure that no components have been lost and no damage to the product has been caused during transportation. If you have any problem, please contact us at any time.

7. Panel Description




ID	Name	Description	ID	Name	Description
1	IR receiver	Receive IR signal.	4	Audio mode selection status	Indicates the currently selected audio mode.
2	Input selection status	The LED will be lit if the corresponding input source is selected.	5	Audio mode selection button	Select audio output mode.
3	Input selection button	Select input port.	6	Power switch	Turn on or o ffpower supply.



ID	Name	Description	
7	DC 5V	DC 5V power suppl y.	
8	HDMI input por ts	Connect to HDMI source devices.	
9	HDMI output por t	Connect to HDMI display.	
10	S/PDIF optical audio output	Connect to amplifier , soundbars by a Toslink cable.	
11	AUX L/R audio output	Connect to analog L/R audio speak er.	

8. Connection Description

8.1 Connection Diagram

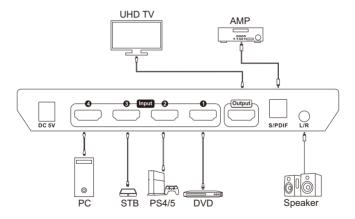

8.2 Connection Steps

1. Connect the input devices to the input ports using 4 HDMI cables.

- 2. Connect the output port to the display device using 1 HDMI cable .
- 3. Connect the amplifier or soundbar to the S/PDIF port using Toslink cable.
- 4.Connect speaker to the AUX L/R audio output.

Tips: You can choose S/PDIF audio output or L/R audio output depending on y our needs.



5. Connect the power cable to the HDMIS witch's DC 5V port and plug it to a power sock et.



6. By now, the connection has been completed. Turn on the power supply and the HDMI Switch will begin to work.

Tips: If you get no sound from L/R audio out, please change the audio format to "2.0" (refer to Chapter 10), as the L/R audio out onl y support 2.0 channel and the switch would not con vert the audio f ormat.

9. Switch Modes Description

Press the button ' Input' until all of the indicators flash once , the switch enters Auto Switch mode or Manual Switch mode . The default is Manual Switch mode

9.1 Manual Switch Mode

In this mode, use panel button or IR remote contr ol to switch input por t.

9.2 Auto Switch Mode

In this mode:

- 1. When attaching a new input device to the switch, the HDMI switch will switch to this just plugged in sour ce automaticall y.
- 2. When removing a connected input sour ce, the HDMI switch will switch to the first v alid input sour ce automaticall y.

Tips: Also you can use panel button or IR r emote contr ol to switch input por t.

10. Audio Modes Description

The Switch supports the high channel audio mode. You can select the audio output of the corresponding channels by pressing the audio mode selection button 'Audio' on the front panel or the k ey 'P' on the remote control.



- 5.1 : In this mode, the input device can select up to 5.1 Channel audio regardless of whether the displa y supports 5.1 Channel or not.
- 2.0 : In this mode, the input device can select up to 2.0 Channel audio regardless of whether the displa y supports 2.0 Channel or not.

Auto: In this mode , the suppor ted audio f ormat is depended on the connected displa y.

Tips: 1. The L/R audio output port cannot support more than 2.0 Channels audio. If Multi channels is played, the L/R audio will not output corr ectly.

2. Change audio mode on switch will not convert the audio format from input source, but may change the pr eferred audio setting of the input sour ce device.

11. CEC Function Description

Consumer Electronics Control (CEC) is a feature of HDMI designed to control HDMI connected devices by using only one remote controller; So, individual CEC enabled devices can command and control each other without user intervention, for up to 15 devices.

If your input devices and output device suppor t CEC command, you can use below function: One Touch Play:

Allows devices to switch the TV to use it as the activ e source when pla yback starts.

System Standby:


Enables users to switch multiple devices to standb y mode with the pr ess of one button.

Tips: The function on this switch acts like: when you turn o ffthe TV which is connected to the switch, all the input devices will be turned off.

Remote Contr ol Pass Through:

Allows remote control commands to be passed through to other devices within the souster.

12. IR Remote Control

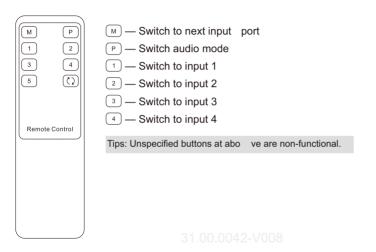

TESmert TESmart

To Enjoy Smart

- HSW0401A1U

Tesla Elec Technology Co.,Ltd C C FC X A HDCP HDCP WEEK-Reg.-Nr. DE 66784279