

4X1 HDMI Switch


USER MANUAL

Features:

- With 4 HDMI inputs and 1 HDMI output
- Support audio output via optical and L/R AUX interfaces
- Support 2.0/5.1/Auto modes of audio output
- Support resolution up to 4K@60Hz 4:4:4
- Compliant with HDCP 2.2
- Support 32 bit color depth
- Support Dolby TrueHD, DTS-HD Master Audio, Dolby Digital and AC-3 audio transmission
- Easy to switch input source with IR remote control
- Support HDR
- Support auto input detection
- All ports support CEC function(The connected HDMI devices also should support CEC)

Packing List:


- 1 * 4X1 HDMI switch
- 1 * IR Remote control
- 1 * DC 5V Power adapter
- 1 * User manual

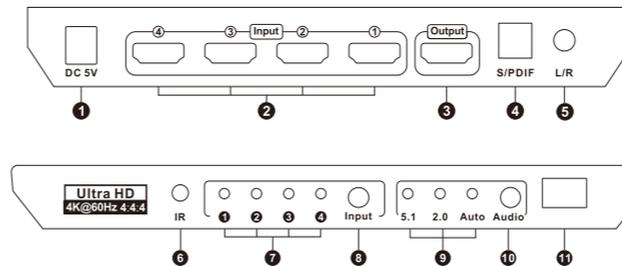Panel Description:

ID	Name	Description
1	DC 5V	DC 5V power supply
2	HDMI input	Connect to HDMI source devices
3	HDMI output	Connect to HD display
4	S/PDIF audio output	Connect to AMP
5	AUX L/R audio output	Connect to analog L/R audio speaker
6	IR receiver	Receive IR signal

ID	Name	Description
7	Input selection status	The LED will be lit if the corresponding input source is selected
8	Input selection button	Select input port Press input selection button until all input LED indicators light on: Turn on or turn off auto input detection mode
9	Audio format indicator	5.1: Prefer 5.1 channels audio output 2.0: Prefer 2.0 channels audio output Auto: Prefer audio channels depends on the HDMI output display
10	Audio format selection button	Select audio formats
11	Power switch	Turn on or turn off power supply

Connection Diagram:

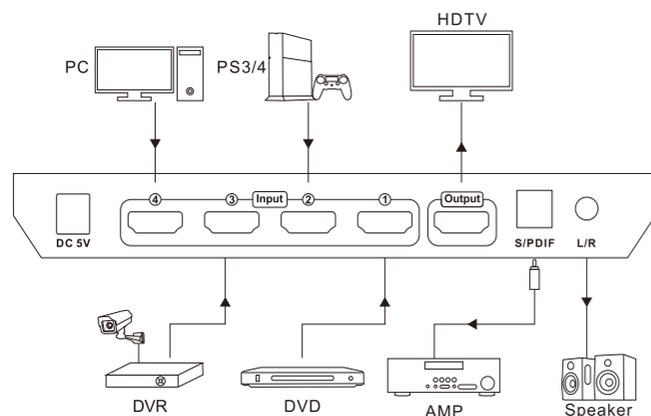

Auto input detection mode :

1. Turn on or off auto input detection mode:

Press input selection button until all input LED indicators light on


2. Auto input detection on:

When attaching a new input device to the switch, the switch will switch to this just source automatically

3. Auto input detection off:

Only use panel button or IR remote control to switch

IR Remote Control:

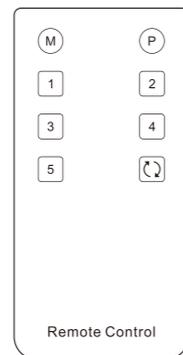

- 1 — Switch to input 1
- 2 — Switch to input 2
- 3 — Switch to input 3
- 4 — Switch to input 4
- M — Switch to next input port
- P — Switching audio format

Note: 1. For the safety request by some express company, the remote control is not equipped battery by default.
2. Other button have no function.

CEC Commands:

- **One Touch Play** allows devices to switch the TV to use it as the active source when playback starts
- **System Standby** enables users to switch multiple devices to standby mode with the press of one button
- **Remote Control Pass Through** allows remote control commands to be passed through to other devices within the system

Warranty Information:

We warrant this product as free of defects in material and workmanship for a period of one (1) year from the date of shipment.

If during the period of warranty this product proves defective under normal use, we will repair or replace this product, provided that this product has not been subjected to mechanical, electrical, or other abuse or modifications. If it fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for six (6) months from the day of reshipment to the buyer.